

# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025 and EN 15804+A2 

## Akmenės cementas AB CEM II/A-P 52.5 N



### Owner of the declaration

Akmenės cementas AB  
J. Dalinkevičiaus gatvė 2  
85118 Naujoji Akmenė  
Lithuania

### Product

CEM II/A-P 52.5 N

### Declared product / Declared unit

1 t

### This declaration is based on Product Category Rules

EN 15804:2012 + A2:2019,  
NPCR Part A:2021 ,  
EN 16908:2017+A1:2022

### Program operator:

EPD Global  
Majorstuen P.O. Box 5250  
N-0303 Oslo  
Norway

### Declaration number

NEPD-11902-11902-2

### Registration number

NEPD-11902-11902-2

### Issue date

21.07.2026

### Valid to

20.07.2031

### EPD Software

Emidat Platform v1.0.0

## **General Information**

### **Product**

CEM II/A-P 52.5 N

### **Program Operator**

EPD Global  
Majorstuen P.O. Box 5250  
N-0303 Oslo  
Norway  
Phone: +47 23 08 80 00  
Email: post@epd-norge.no

### **Declaration Number**

NEPD-11902-11902-2

### **This declaration is based on Product Category Rules**

EN 15804:2012 + A2:2019,  
NPCR Part A:2021 ,  
EN 16908:2017+A1:2022

### **Statements**

The owner of the declaration shall be liable for the underlying information and evidence. The Norwegian EPD Foundation shall not be liable with respect to manufacturer, life cycle assessment data and evidences.

### **Declared unit**

1 t

### **General information on verification of EPD from EPD tools**

Independent verification of data, other environmental information and the declaration according to ISO 14025:2011-10, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD Global's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD Global, and iii) the process is reviewed annually by an independent third-party verifier. See Appendix G of EPD Global's General Programme Instructions for further information on EPD tools.

### **Verification**

Independent third-party verification based on the verification of the EPD tool, background data and test-EPD in accordance with EPD Global's procedures and guidelines for verification and approval of EPD tools.  
Third-party verifier: Charlotte Merlin, FORCE Technology

### **Owner of the declaration**

Akmenės cementas AB

### **Contact person**

info@cementas.lt

### **Phone**

+370 425 58324

### **Email**

info@cementas.lt

### **Manufacturer**

Akmenės cementas AB  
J. Dalinkevičiaus gatvė 2  
85118 Naujoji Akmenė, Lithuania

### **Place of production**

Naujoji Akmenė, Lithuania

### **Management system**

ISO 9001 , ISO 14001 , ISO 45001 , ISO 50001

### **Organisation no**

LT530091413

### **Issue date**

21.07.2026

### **Valid to**

20.07.2031

### **Year of study**

2025

### **Comparability**

EPDs of construction products may not be comparable if they do not comply with EN 15804 and are not seen in a building context. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database (including primary and secondary data).

### **Development and verification of EPD**

The declaration was created using the Emidat EPD tool v1.0, developed by Emidat GmbH which is third-party verified and approved as a Reference Flow Tool with internal review under administration and surveillance by EPD Global under provisions stated in general information on verification of EPD from EPD tools.

Developer of EPD: Urs Müller

Reviewer of company-specific input data and EPD: Lars Busterud

### **Approved**



Håkon Hauan, The Norwegian EPD Foundation

## Product

### Product description

Akmenės Cementas CEM II/A-P 52.5 N is a Portland-pozzolana cement with ordinary early strength. The cement contains a natural pozzolan from Lithuania. The product is produced according to the harmonized standard EN 197-1.


Further technical information can be found on [www.cementas.lt](http://www.cementas.lt).

No packaging was included for the modeled product.

### Application description

Akmenės Cementas CEM II/A-P 52.5 N can be used as a binder in ready-mix concrete and for prefabricated concrete products and wares. It can further be used as a component in dry mortars and for ground stabilization work.

### Production process

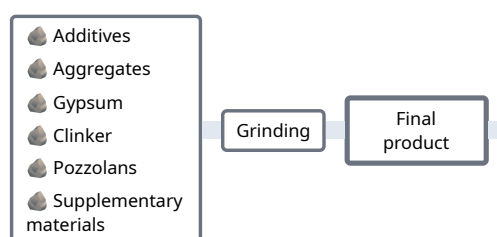

### Upstream production processes



### Product specification

| Name of ingredient      | Share of total weight | Country of origin |
|-------------------------|-----------------------|-------------------|
| Additives               | 0 - 5 %               | Poland            |
| Aggregates              | 0 - 5 %               | Lithuania         |
| Clinker                 | 65 - 89 %             | Lithuania         |
| Gypsum                  | 5 - 11 %              | Latvia            |
| Pozzolans               | 11 - 35 %             | Lithuania         |
| Supplementary materials | 0 - 5 %               | Lithuania         |

### Technical data

|                                         | Unit                | Value |
|-----------------------------------------|---------------------|-------|
| Compressive Strength (Prisms, EN 196-1) | N / mm <sup>2</sup> | 52.5  |
| Density                                 | kg / m <sup>3</sup> | 3100  |

The product is produced according to the harmonized standard EN 197-1.

### Market

Lithuania

## Recipients

B2B

## LCA: Calculation rules

### Declared unit

1 t


### Product lifetime

Not declared

### Reference service life

Not declared

### System boundary

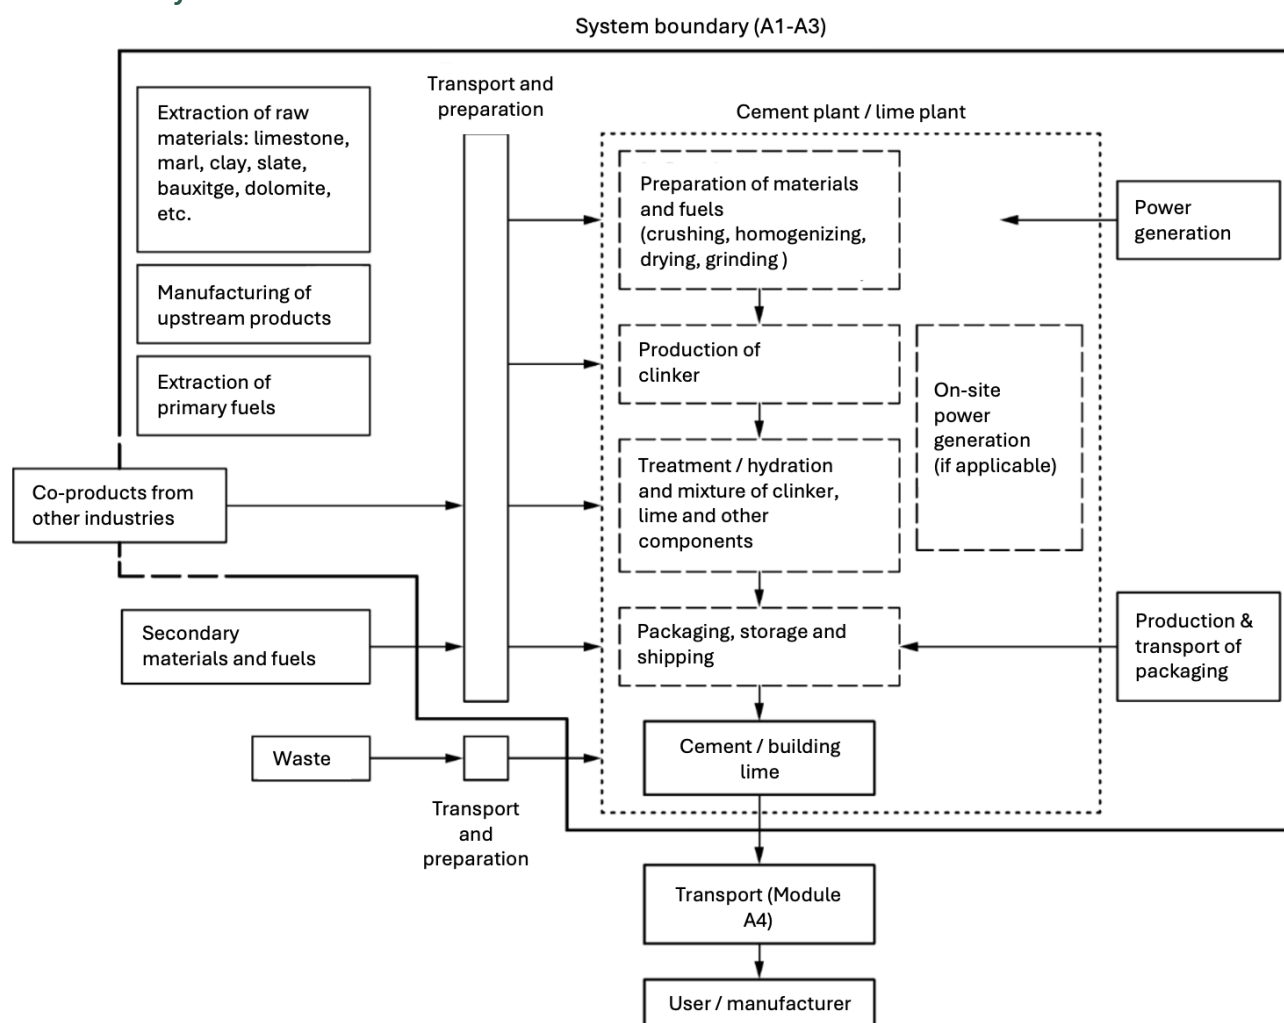

### Data quality

The foreground data are based on extensive and detailed data collection at the production site of the manufacturer, covering key processes such as raw material sourcing, formulation, and manufacturing. These foreground data are fully linked with corresponding datasets from the background database (ecoinvent 3.10) or with EN15804+A2-compliant EPDs, ensuring consistency, reliability, and maintaining alignment with the latest industry standards.

The overall data representativeness is rated as good with an overall score of 4.00/5, in accordance with EN 15804+A2 Annex E guidance on data quality assessment, considering geographical, technical, and temporal representativeness.

The following table discloses all processes or activities assessed with very poor or poor data representativeness according to EN 15804+A2, as well as those assessed as fair that contribute more than 30 % to any core impact indicator in A1–A3:

| Element               | Minimal Representativeness | Source         | Year |
|-----------------------|----------------------------|----------------|------|
| Additives             | Poor                       | ecoinvent 3.10 | 2023 |
| Aggregates            | Poor                       | ecoinvent 3.10 | 2023 |
| Electricity from grid | Poor                       | ecoinvent 3.10 | 2023 |
| Gypsum                | Poor                       | ecoinvent 3.10 | 2023 |
| Packaging             | Poor                       | ecoinvent 3.10 | 2023 |
| Pozzolans             | Poor                       | ecoinvent 3.10 | 2023 |

### System boundaries (X=included, MND=module not declared)

|                  | Production          |           |               | Installation |                      | Use stage |             |        |             |               |                        |                       | End-of-Life |           |                  |          | Next product system                           |
|------------------|---------------------|-----------|---------------|--------------|----------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------|-----------|------------------|----------|-----------------------------------------------|
|                  | Raw material supply | Transport | Manufacturing | Transport    | Installation Process | Use       | Maintenance | Repair | Replacement | Refurbishment | Operational Energy Use | Operational Water Use | Demolition  | Transport | Waste Processing | Disposal | Benefits and loads beyond the system boundary |
| Module           | A1                  | A2        | A3            | A4           | A5                   | B1        | B2          | B3     | B4          | B5            | B6                     | B7                    | C1          | C2        | C3               | C4       | D                                             |
| Modules declared | x                   | x         | x             | MND          | MND                  | MND       | MND         | MND    | MND         | MND           | MND                    | MND                   | MND         | MND       | MND              | MND      | MND                                           |
| Geography        |                     |           | LT            | MND          | MND                  | MND       | MND         | MND    | MND         | MND           | MND                    | MND                   | MND         | MND       | MND              | MND      | MND                                           |

For the geographies modeled in A1 and A2, refer to *Product specification*.

Type of EPD: Cradle to gate

#### Stage of Material Production and Construction

Module A1: Extraction and transport of raw materials and fuels, Clinker production, Production of secondary constituents, Production of additives, Production of consumables

Module A2: Transport of constituents, additives, and consumables

Module A3: Cement production, Preparation of cement for delivery

#### Cut-off criteria

No cut-offs were applied.

#### Allocation

Foreground inventory data (energy and fuels, ancillary materials, emissions and waste) was collected at the production process level. Mass-based allocation was applied to allocate the total output of the production process in 2025 to the reference product.

#### Key assumptions and estimates

Production process flows are allocated to the reference product, as described under allocation. The mass-based allocation assumes a uniform distribution of production impacts across co-products. Foreground inventory data is checked for consistency of production process, to ensure the validity of the allocated results.

## LCA: Results

The following results are based on the market-based electricity approach applied to the foreground system (A3). Further details on electricity data are provided in the Additional Requirements section.

### Core environmental impact indicators

| Indicator          | Unit                             | A1-A3    |
|--------------------|----------------------------------|----------|
| GWP-total (net)    | kg CO <sub>2</sub> -eq.          | 5.62e+02 |
| GWP-fossil (net)   | kg CO <sub>2</sub> -eq.          | 5.60e+02 |
| GWP-biogenic (net) | kg CO <sub>2</sub> -eq.          | 4.30e-01 |
| GWP-luluc          | kg CO <sub>2</sub> -eq.          | 1.73e+00 |
| ODP                | kg CFC-11-Eq                     | 9.69e-07 |
| AP                 | mol H <sup>+</sup> -Eq           | 2.05e+00 |
| EP-freshwater      | kg P-Eq                          | 6.62e-02 |
| EP-marine          | kg N-Eq                          | 3.63e-01 |
| EP-terrestrial     | mol N-Eq                         | 4.04e+00 |
| POCP               | kg NMVOC-Eq                      | 1.11e+00 |
| ADPE               | kg Sb-Eq                         | 3.69e-03 |
| ADPF               | MJ, net calorific value          | 1.92e+03 |
| WDP                | m <sup>3</sup> world Eq deprived | 1.89e+01 |

**GWP-total (net):** Global Warming Potential - total (net), **GWP-fossil (net):** Global warming potential - fossil (net), **GWP-biogenic (net):** Global Warming Potential - biogenic (net), **GWP-luluc:** Global Warming Potential - luluc, **ODP:** Depletion potential of the stratospheric ozone layer, **AP:** Acidification potential, Accumulated Exceedance, **EP-freshwater:** Eutrophication potential - freshwater, **EP-marine:** Eutrophication potential - marine, **EP-terrestrial:** Eutrophication potential - terrestrial, **POCP:** Photochemical Ozone Creation Potential, **ADPE:** Abiotic depletion potential - non-fossil resources, **ADPF:** Abiotic depletion potential - fossil resources, **WDP:** Water (user) deprivation potential

### Remarks to environmental impacts

Net values are declared for the GWP indicators in modules A1-A3. These values exclude 69.72 kg CO<sub>2</sub> eq. from the combustion of the fossil fraction of waste-derived fuels. In accordance with the "polluter pays" principle of EN 15804+A2, these emissions are attributed to the system generating the waste. The corresponding gross values for the GWP indicators are provided as additional environmental information in the table "Environmental impacts – Gross".

### Additional indicators

| Indicator | Unit              | A1-A3    |
|-----------|-------------------|----------|
| PM        | disease incidence | 1.31e-05 |
| IRP       | kBq U235-Eq       | 9.65e+00 |
| ETP-fw    | CTUe              | 4.12e+02 |
| HTP-c     | CTUh              | 3.57e-07 |
| HTP-nc    | CTUh              | 2.36e-06 |
| SQP       | dimensionless     | 2.23e+03 |

**PM:** Potential incidence of disease due to PM emissions, **IRP:** Potential Human exposure efficiency relative to U235, **ETP-fw:** Potential Comparative Toxic Unit for ecosystems, **HTP-c:** Potential Comparative Toxic Unit for humans - cancer effects, **HTP-nc:** Potential Comparative Toxic Unit for humans - non-cancer effects, **SQP:** Potential Soil quality index. **IRP:** This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator. **ETP-fw, HTP-c, HTP-nc, SQP:** The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with these indicators.

## Use of resources

| Indicator | Unit           | A1-A3    |
|-----------|----------------|----------|
| PERE      | MJ             | 5.65e+02 |
| PERM      | MJ             | 0.00e+00 |
| PERT      | MJ             | 5.65e+02 |
| PENRE     | MJ             | 1.91e+03 |
| PENRM     | MJ             | 8.29e+00 |
| PENRT     | MJ             | 1.92e+03 |
| SM        | kg             | 1.60e+00 |
| RSF       | MJ             | 6.14e+02 |
| NRSF      | MJ             | 5.18e+02 |
| FW        | m <sup>3</sup> | 5.72e-01 |

**PERE:** Primary energy resources - renewable: use as energy carrier , **PERM:** Primary energy resources - renewable: used as raw materials , **PERT:** Primary energy resources - renewable: total , **PENRE:** Primary energy resources - non-renewable: use as energy carrier , **PENRM:** Primary energy resources - non-renewable: used as raw materials , **PENRT:** Primary energy resources - non-renewable: total , **SM:** Use of secondary material , **RSF:** Renewable secondary fuels , **NRSF:** Non-renewable secondary fuels , **FW:** Net use of fresh water

## Waste flows

| Indicator | Unit | A1-A3    |
|-----------|------|----------|
| HWD       | kg   | 5.94e-02 |
| NHWD      | kg   | 2.29e+00 |
| RWD       | kg   | 0.00e+00 |

**HWD:** Hazardous waste disposed , **NHWD:** Non hazardous waste disposed , **RWD:** Radioactive waste disposed

## Output flows

| Indicator | Unit | A1-A3    |
|-----------|------|----------|
| CRU       | kg   | 0.00e+00 |
| MFR       | kg   | 9.90e+00 |
| MER       | kg   | 0.00e+00 |
| EEE       | MJ   | 0.00e+00 |
| EET       | MJ   | 0.00e+00 |

**CRU:** Components for re-use , **MFR:** Materials for recycling , **MER:** Materials for energy recovery , **EEE:** Exported electrical energy , **EET:** Exported thermal energy

| Name                                              | Value    | Unit |
|---------------------------------------------------|----------|------|
| Biogenic carbon content in product                | 0.00e+00 | kg C |
| Biogenic carbon content in accompanying packaging | 0.00e+00 | kg C |

## Additional requirements

### Greenhouse gas emissions from the use of electricity in the manufacturing phase

Electricity consumption in the manufacturing phase is composed from the sources below. This EPD follows the market-based approach.

| Approach           | Electricity                                                                                     | Quantity [kWh] | Emission Factor [kg CO <sub>2</sub> e/kWh] |
|--------------------|-------------------------------------------------------------------------------------------------|----------------|--------------------------------------------|
| market-based       | ecoinvent: electricity production, photovoltaic, 570kWp open ground installation, multi-Si (NL) | 4.21           | 0.10                                       |
| market-based       | ecoinvent: electricity production, wind, >3MW turbine, onshore (LT)                             | 9.29           | 0.02                                       |
| market-based       | ecoinvent: electricity production, hydro, pumped storage (LT)                                   | 21.26          | 0.63                                       |
| market-based       | ecoinvent: electricity production, deep geothermal (LT)                                         | 0.10           | 0.07                                       |
| market-based       | ecoinvent: electricity production, wood, future (GLO)                                           | 16.48          | 0.05                                       |
| ( location-based ) | ( ecoinvent: market for electricity, high voltage (LT) )                                        | ( 51.35 )      | ( 0.40 )                                   |

Rows marked with () are provided for reference and not used in the assessment.

Electricity consumption in upstream production processes:

| Electricity                                                                                     | Emission Factor [kg CO <sub>2</sub> e/kWh] |
|-------------------------------------------------------------------------------------------------|--------------------------------------------|
| ecoinvent: electricity production, photovoltaic, 570kWp open ground installation, multi-Si (NL) | 0.10                                       |
| ecoinvent: electricity production, wind, >3MW turbine, onshore (LT)                             | 0.02                                       |
| ecoinvent: electricity production, hydro, pumped storage (LT)                                   | 0.63                                       |
| ecoinvent: electricity production, deep geothermal (LT)                                         | 0.07                                       |
| ecoinvent: electricity production, wood, future (GLO)                                           | 0.05                                       |

### Dangerous substances

The product contains no hazardous substances given by the REACH Candidate List or the Norwegian Priority List.

## Additional environmental information

### Secondary content

The product contains 0.16 % secondary material. Secondary material includes recycled, recovered and by-product content.

### Additional environmental impact indicators required in NPCR Part A for construction products

| Indicator | Unit                    | A1-A3    |
|-----------|-------------------------|----------|
| GWP-IOBC  | kg CO <sub>2</sub> -eq. | 5.62e+02 |

**GWP-IOBC:** Global Warming Potential - Instantaneous oxidation of biogenic carbon

### Gross and net global warming potential (A1-A3)

| Indicator  | Unit                    | Gross    | Net      |
|------------|-------------------------|----------|----------|
| GWP-total  | kg CO <sub>2</sub> -eq. | 6.32e+02 | 5.62e+02 |
| GWP-fossil | kg CO <sub>2</sub> -eq. | 6.30e+02 | 5.60e+02 |

## Bibliography

|                       |                                                                                                                                                           |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| CEN/TR 15941:2010     | Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data                             |
| EN 15804:2012+A2:2019 | Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products                  |
| EN 15942:2022-04      | Sustainability of construction works - Environmental product declarations - Communication format business-to-business                                     |
| ISO 14025:2011-10     | Environmental labels and declarations - Type III environmental declarations - Principles and procedures                                                   |
| ISO 14040:2021-02     | Environmental management - Life cycle assessment - Principles and framework                                                                               |
| ISO 14044:2021-02     | Environmental management - Life cycle assessment - Requirements and guidelines                                                                            |
| EF 3.1                | Environmental Footprint (EF) Life Cycle Impact Assessment method - Characterisation Factors version 3.1, European Commission, Joint Research Centre (JRC) |
| ecoinvent 3.10        | ecoinvent, Zurich, Switzerland, database version 3.10                                                                                                     |
| NPCR Part A:2021      | Construction products and services, Version 2.0. Issue date: 24.03.2021; validity extended to 31.12.2026.                                                 |
| EN 16908:2017+A1:2022 | Cement and building lime – Environmental product declarations – Product category rules complementary to EN 15804.                                         |

|                                                                                                                              |                                                              |       |                                                                |
|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|-------|----------------------------------------------------------------|
|  <b>epd-global</b><br>Powered by EPD-Norway | <b>Program Operator</b>                                      | Phone | +47 23 08 80 00                                                |
|                                                                                                                              | EPD Global                                                   | Email | post@epd-norge.no                                              |
|                                                                                                                              | P.O. Box 5250 Majorstuen, N-0303 Oslo<br>Norway              | Web   | www.epd-global.no                                              |
|  <b>epd-global</b><br>Powered by EPD-Norway | <b>Publisher</b>                                             | Phone | +47 23 08 80 00                                                |
|                                                                                                                              | EPD Global                                                   | Email | post@epd-norge.no                                              |
|                                                                                                                              | P.O. Box 5250 Majorstuen, N-0303 Oslo<br>Norway              | Web   | www.epd-global.no                                              |
|  <b>Akmenės CEMENTAS</b>                   | <b>Owner of the declaration</b>                              | Phone | +370 425 58324                                                 |
|                                                                                                                              | Akmenės cementas AB                                          | Email | info@cementas.lt                                               |
|                                                                                                                              | J. Dalinkevičiaus gatvė 2, 85118 Naujoji Akmenė<br>Lithuania | Web   | <a href="https://cementas.lt/en/">https://cementas.lt/en/</a>  |
|  <b>Akmenės CEMENTAS</b>                  | <b>Author of the life cycle assessment</b>                   | Phone | +370 425 58324                                                 |
|                                                                                                                              | Akmenės cementas AB                                          | Email | info@cementas.lt                                               |
|                                                                                                                              | J. Dalinkevičiaus gatvė 2, 85118 Naujoji Akmenė<br>Lithuania | Web   | <a href="https://cementas.lt/en/">https://cementas.lt/en/</a>  |
|                                           | ECO Platform                                                 | Web   | <a href="http://www.eco-platform.org">www.eco-platform.org</a> |
|                                                                                                                              | ECO Portal                                                   | Web   | <a href="#">ECO Portal</a>                                     |
|                                                                                                                              |                                                              |       |                                                                |
|  <b>EMIDAT</b>                            | <b>Developer of EPD generator</b>                            | Phone | +49 176 56 96 77 91                                            |
|                                                                                                                              | Emidat GmbH                                                  | Email | epd@emidat.com                                                 |
|                                                                                                                              | Sandstraße 33, 80335 München<br>Germany                      | Web   | www.emidat.com                                                 |